

**Materials**

Stationery - Cer / Sic

Rotary - Car / Sic


Elastomer - NBR / EPDM / Viton

**Working Conditions**

Pressure &lt; 8 bar

Speed &lt; 10 m/s

Temperature up to 150°C

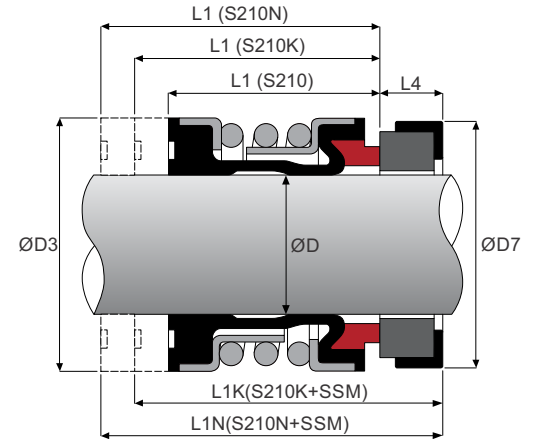

Metric		ØD3	L1 (S210)	L1 (S210K)	L1 (S210N)	L1K	L1N	SSM	
Shaft ØD	Code							ØD7	L4
10	0100	20	15	27.5	35.0	32.5	40.0	21	5
12	0120	22	15	26.5	34.0	32.5	40.0	23	6
14	0140	24	15	29.0	34.0	35.0	40.0	25	6
15	0150	25	15	29.0	34.0	35.0	40.0	26	6
16	0160	26	15	29.0	34.0	35.0	40.0	27	6
18	0180	32	20	31.5	39.0	37.5	45.0	33	6
20	0200	34	20	31.5	39.0	37.5	45.0	35	6
22	0220	36	20	31.5	39.0	37.5	45.0	37	6
24	0240	38	20	34.0	44.0	40.0	50.0	39	6
25	0250	39	20	34.0	44.0	40.0	50.0	40	6
28	0280	42	26	36.5	44.0	42.5	50.0	43	6
30	0300	44	26	35.5	43.0	42.5	50.0	45	7
32	0320	46	26	35.5	48.0	42.5	55.0	48	7
33	0330	47	26	35.5	48.0	42.5	55.0	48	7
35	0350	49	26	34.5	47.0	42.5	55.0	50	8
38	0380	54	30	37.0	47.0	45.0	55.0	56	8
40	0400	56	30	37.0	47.0	45.0	55.0	58	8
43	0430	59	30	37.0	52.0	45.0	60.0	61	8
45	0450	61	30	37.0	52.0	45.0	60.0	63	8
48	0480	64	30	35.0	50.0	45.0	60.0	66	10
50	0500	66	30	37.5	50.0	47.5	60.0	70	10
53	0530	69	30	37.5	60.0	47.5	70.0	73	10
55	0550	71	30	37.5	60.0	47.5	70.0	75	10
58	0580	78	33	42.5	60.0	52.5	70.0	78	10
60	0600	80	33	40.5	58.0	52.5	70.0	80	12
63	0630	83	33	40.5	58.0	52.5	70.0	83	12
65	0650	85	33	40.5	68.0	52.5	80.0	85	12
68	0680	88	33	40.5	68.0	52.5	80.0	90	12
70	0700	90	33	48.0	68.0	60.0	80.0	92	12
75	0750	99	40	48.0	68.0	60.0	80.0	97	12
80	0800	104	40	47.5	77.5	61.5	91.5	105	14
85	0850	109	40	47.5	77.5	61.5	91.5	110	14
90	0900	114	40	52.5	77.5	66.5	91.5	115	14
95	0950	119	40	52.5	77.5	66.5	91.5	120	14
100	1000	124	40	52.5	77.5	66.5	91.5	125	14