


Materials

Rotary - Car / SiC / SSiC / TC
 Elastomer - NBR / EPDM / Viton / Aflas / FFKM / PTFE

Working Conditions

Pressure ≤ 15 bar
 Speed ≤ 12 m/s
 Temperature from -40°C up to 205°C

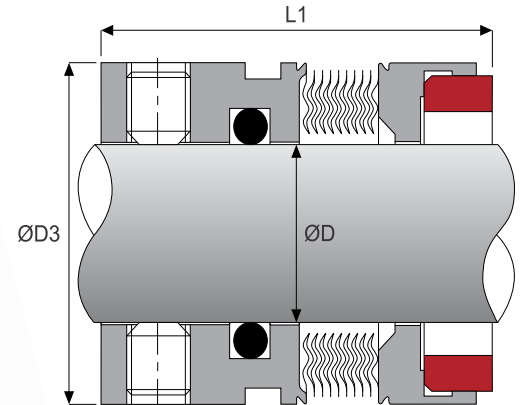

Inches			
Shaft ØD	Code	ØD3	L1
19.1	0191	33.3	31.8
22.2	0222	36.8	31.8
23.8	0238	38.1	31.8
25.4	0254	39.7	31.8
28.6	0286	42.8	31.8
31.7	0317	46.0	33.3
34.9	0349	49.2	36.5
38.1	0381	52.4	36.5
41.3	0413	55.5	36.5
44.5	0444	58.7	36.5
47.6	0476	61.9	38.1
50.8	0508	65.1	38.1
54.0	0540	68.2	38.1
57.2	0572	71.4	39.7
60.3	0603	74.6	39.7
63.5	0635	80.9	39.7
66.7	0666	84.1	41.3
69.9	0699	87.3	41.3
73.0	0730	92.1	42.8
76.2	0762	95.3	42.8
79.4	0794	98.4	44.5
82.1	0821	101.6	44.5
85.7	0857	104.8	44.5
88.9	0889	108.0	47.6
92.1	0921	111.1	47.6
95.3	0953	114.3	47.6
98.4	0984	117.5	47.6
101.6	1016	120.7	47.6

Metric			
Shaft ØD	Code	ØD3	L1
18	0180	32.0	27.5
20	0200	33.3	27.5
22	0220	36.0	27.5
24	0240	38.1	30.0
25	0250	39.0	30.0
28	0280	42.0	32.5
30	0300	44.0	32.5
32	0320	46.0	32.5
33	0330	47.0	32.5
35	0350	49.0	32.5
38	0380	52.4	34.0
40	0400	55.6	34.0
43	0430	58.7	34.0
45	0450	58.7	34.0
48	0480	61.9	34.0
50	0500	65.1	34.5
53	0530	68.3	34.5
55	0550	71.0	34.5
60	0600	74.6	39.5
65	0650	84.1	39.5
70	0700	87.3	45.0
75	0750	95.3	45.0
80	0800	98.4	44.5
85	0850	104.8	44.5
90	0900	108.0	49.5
95	0950	114.3	49.5
100	1000	120.7	49.5