


Materials

Rotary - Car / SiC / SSiC / TC
 Elastomer - NBR / EPDM / Viton / Aflas / FFKM

Working Conditions

Pressure ≤ 20 bar
 Speed ≤ 25 m/s
 Temperature from -40°C up to 205°C

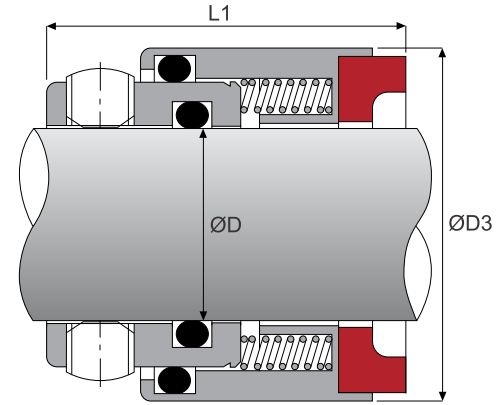

Shaft $\varnothing D$	$\varnothing D3$	L1
18	32	27.9
20	34	27.9
22	36	27.9
24	38	29.9
25	39	29.9
28	42	32.4
30	44	32.4
32	46	32.4
33	47	32.4
35	49	32.4
38	54	33.9
40	56	33.9
43	59	33.9
45	61	33.9
48	64	33.9
50	66	34.4
53	69	34.4
55	71	34.4
58	78	38.9
60	80	38.9
63	83	38.9
65	85	38.9
68	88	37.4
70	90	44.9
75	99	44.9
80	104	44.2
85	109	44.2
90	114	49.2
95	119	49.2
100	124	49.2