


Materials

Rotary - Car / SiC / SSiC / TC
 Elastomer - NBR / EPDM / Viton / Aflas / FFKM

Working Conditions

Pressure ≤ 25 bar
 Speed ≤ 15 m/s
 Temperature up to 205°C

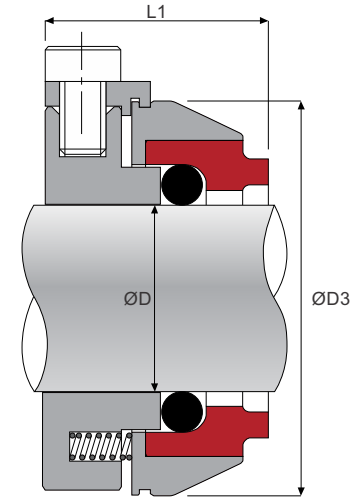

Metric Shaft Ø	ØD3	L1
20	45.3	27.9
22	47.3	27.9
24	49.3	27.9
25	50.3	27.9
28	53.3	27.9
30	55.3	27.9
32	57.3	27.9
33	58.3	27.9
35	60.3	27.9
38	63.3	27.9
40	65.3	27.9
42	67.3	27.9
43	68.3	27.9
45	70.3	27.9
48	73.3	27.9
50	75.3	27.9
53	78.3	27.9
55	80.3	27.9
60	85.3	27.9
65	96.5	30.3
70	101.5	30.3
75	106.5	30.3
80	111.5	30.3
85	116.5	30.3
90	121.5	30.3
95	126.5	30.3
100	131.5	30.3

Imperial Shaft Ø	ØD3	L1
0.625	41.20	27.9
0.750	44.37	27.9
0.875	47.55	27.9
1.000	50.72	27.9
1.125	53.90	27.9
1.250	57.07	27.9
1.375	60.25	27.9
1.500	63.42	27.9
1.625	66.60	27.9
1.750	69.77	27.9
1.875	72.95	27.9
2.000	76.12	27.9
2.125	79.30	27.9
2.250	82.47	27.9
2.375	85.65	27.9
2.500	88.82	27.9
2.625	98.20	30.3
2.750	101.37	30.3
2.875	104.55	30.3
3.000	107.72	30.3
3.125	110.90	30.3
3.250	114.07	30.3
3.375	117.25	30.3
3.500	120.42	30.3
3.625	123.60	30.3
3.750	126.77	30.3
3.875	129.95	30.3
4.000	133.12	30.3