


Materials

Rotary	- Car / Sic / SSic / TC
Stationary	- Sic / SSIC / TC / SS
Elastomer	- NBR / EPDM / Viton

Working Conditions

Pressure	≤ 12 bar
Speed	≤ 16 m/s
Temperature up to	205°C

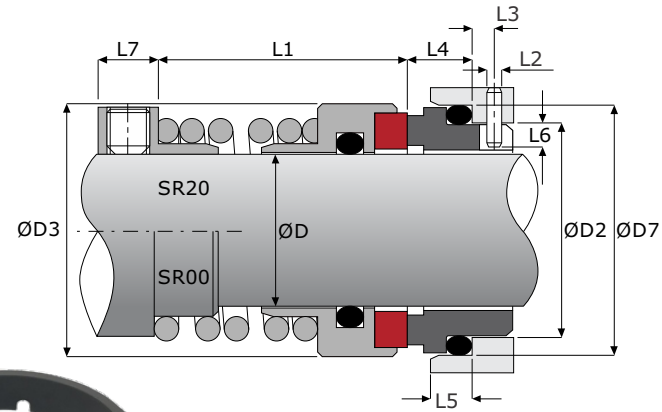

Shaft Ø		ØD2	ØD3	ØD7	L1	L2	L3	L4	L5	L6	L7
Metric	Imperial										
	15.8	24.3	29.0	28.6	24.5	3.0	4.0	9.0	4.4	4.2	8.0
	19.1	27.4	32.5	31.7	24.5	3.0	4.0	9.0	4.4	4.1	8.0
20		29.0	34.5	33.3	27.5	3.0	4.0	9.0	4.4	4.0	9.5
	22.2	30.7	34.9	34.9	26.0	3.0	4.0	9.0	4.4	4.2	9.5
25		33.8	38.1	39.9	30.0	3.0	4.0	10.0	5.5	3.9	9.5
	25.4	33.8	38.1	39.9	30.0	3.0	4.0	10.0	5.5	4.2	9.5
28		37.0	42.0	43.1	31.5	3.0	4.0	10.0	5.5	4.0	9.5
	28.6	37.0	42.9	43.1	31.5	3.0	4.0	10.0	5.5	4.2	9.5
30		38.6	45.5	44.6	31.5	3.0	4.0	10.0	5.5	3.8	9.5
	31.7	40.3	46.0	46.3	34.5	3.0	4.0	10.0	5.5	4.2	9.5
32		40.8	47.0	46.3	34.5	3.0	4.0	10.0	5.5	3.9	9.5
	34.9	43.5	49.2	49.5	37.5	3.0	4.0	10.0	5.5	4.2	9.5
35		43.5	50.0	49.5	37.5	3.0	4.0	10.0	5.5	3.8	9.5
38		46.6	53.0	52.6	37.5	3.0	4.0	10.0	5.5	3.8	9.5
	38.1	46.6	52.4	52.6	37.5	3.0	4.0	10.0	5.5	4.2	9.5
40		48.1	55.0	54.3	37.5	3.0	4.0	10.0	5.5	3.6	9.5
	41.2	49.8	55.5	55.8	37.5	3.0	4.0	10.0	5.5	4.2	9.5
42		49.8	55.5	55.8	37.5	3.0	4.0	10.0	5.5	3.4	9.5
	44.4	53.0	58.7	59.0	37.5	3.0	4.0	10.0	5.5	4.2	9.5
45		53.0	60.0	59.0	37.5	3.0	4.0	10.0	5.5	3.5	9.5
	47.6	57.7	61.9	63.7	42.5	3.0	5.0	10.0	5.5	5.0	12.7
50		59.3	66.0	65.4	45.5	3.0	5.0	10.0	5.5	4.2	12.7
	50.8	60.9	66.7	66.9	45.5	3.0	5.0	10.0	5.5	5.0	12.7
	53.9	64.0	69.9	70.0	47.0	3.0	5.0	10.0	5.5	5.0	12.7
55		64.0	71.0	70.0	47.0	3.0	5.0	10.0	5.5	4.0	12.7
	57.1	67.1	73.0	73.2	47.0	3.0	5.0	10.0	5.5	4.9	12.7
60		70.4	77.0	76.4	50.5	3.0	5.0	10.0	5.5	4.7	12.7
	60.3	70.4	76.2	76.4	50.5	3.0	5.0	10.0	5.5	5.0	12.7
	63.5	73.5	79.4	79.6	50.5	3.0	5.0	10.0	5.5	5.0	12.7
65		75.2	82.0	81.2	53.5	3.0	5.0	10.0	5.5	4.6	12.7
	66.6	76.7	82.6	82.7	53.5	3.0	5.0	10.0	5.5	5.0	12.7
	69.8	79.9	85.7	85.9	53.5	3.0	5.0	10.0	5.5	5.0	12.7
70		79.9	87.0	85.9	53.5	3.0	5.0	10.0	5.5	4.5	12.7
	73	83.0	90.0	89.1	56.5	3.0	5.0	10.0	5.5	4.9	14.3
75		84.7	91.5	90.8	56.6	3.0	5.0	10.0	5.5	4.4	14.3
	76.2	89.4	95.3	95.4	63.0	3.0	5.0	10.0	5.5	6.6	14.3