
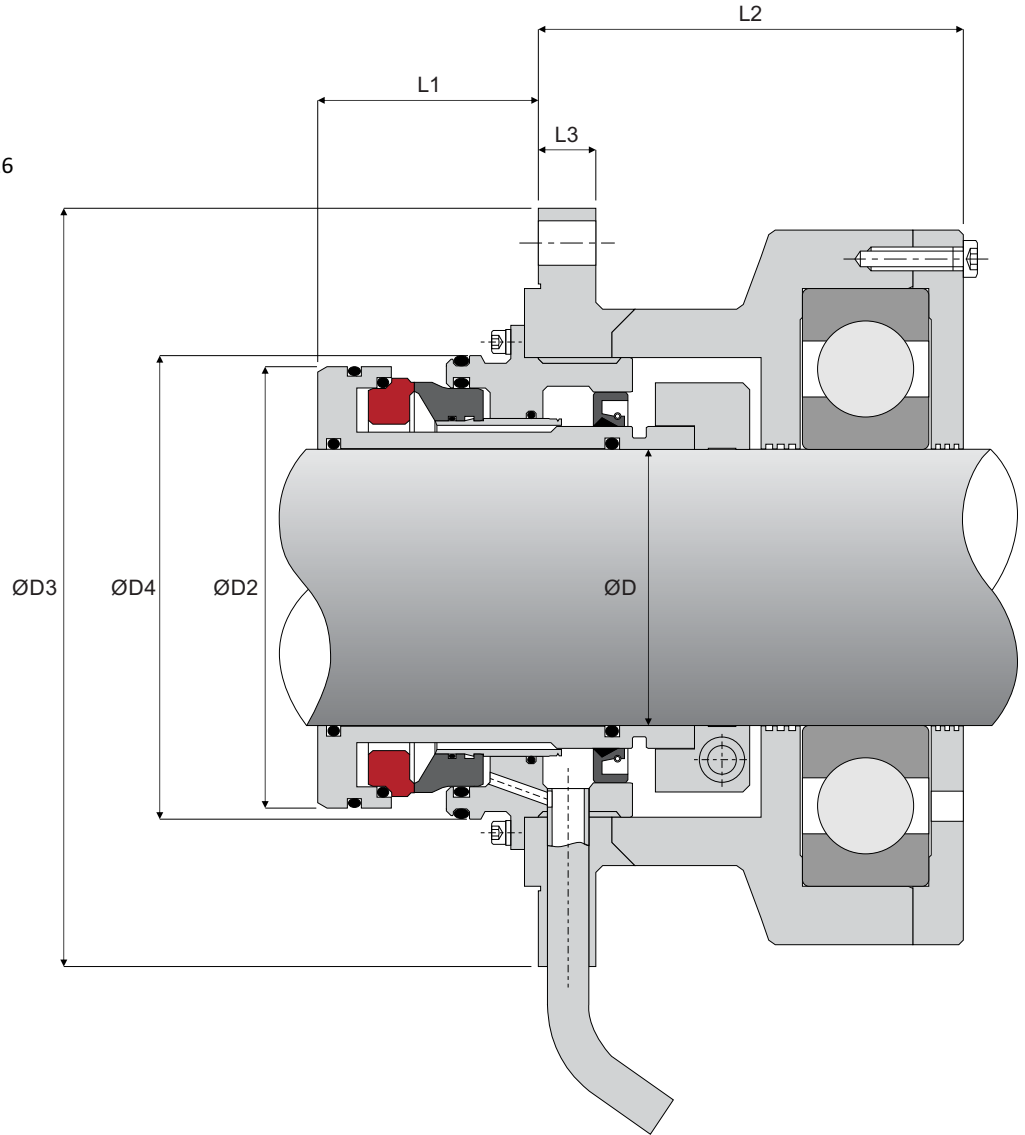


### Materials

Stationary	- SSiC
Rotary	- SSiC
Elastomer	- Viton
Wetted Parts	- PVDF / 2205 / AISI926

### Working Conditions

Pressure	≤ 7 bar
Speed	≤ 5 m/s
Temperature	up to 80°C

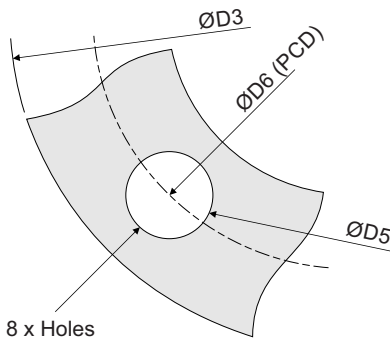

Size	ØD2	ØD3	ØD4	ØD5	ØD6	L1	L2	L3
0400	98	176	106,6	11	155	131	81	25
0600	133	240	144,6	18	210	137	92	25
0800	150	275	159,6	23	240	147	89	25
1000	172	305	181,6	23	270	166	92	25
1200	192	330	201,6	23	295	166	96	25